

Valor L1 LINEAR SERIES - 2-SIDED FIREPLACE™



L1 Linear Series 2-Sided Fireplace shown with Long Beach Driftwood, Fluted Black Liner and 1" Finishing Trim in Black

THE L1 LINEAR 2-SIDED FIREPLACE - Combining linear design with Valor heat performance, the L1 see-thru provides efficient zone heating for two separate spaces.

Valor Comfort Control - Select, adjust and program your desired temperature settings using the ValorStat Plus remote and Wall Switch Kit (both standard with purchase).

Quality surrounds in Bronze, Black, Brushed Nickel and GRC Sandstone finishes frame spectacular flames and radiant warmth from within. Firebed options for the L1 see-thru include the Long Beach Driftwood, Murano Glass and Beaded Glass kits.

Join living spaces seamlessly with Valor warmth, design and reliable home comfort.


**THE ORIGINAL
RADIANT GAS FIREPLACE™**
www.valorfireplaces.com

Valor L1 LINEAR SERIES - 2-SIDED FIREPLACE™

L1 2-SIDED FIREPLACE COMPONENTS

ENGINES	1600IN	L1 2-Sided Linear Engine Direct Vent NG
	1600IP	L1 2-Sided Linear Engine Direct Vent LPG
FUEL BEDS	1505DWK	Long Beach Driftwood Kit
	1510DGM	Murano Decorative Glass Kit
	1512MBS	Beaded Glass Kit
LINERS	1615FBL	Fluted Black Liner
	1625EBL	Enamel Black Liner
SURROUNDS	1550LSB	3-1/2" Surround - Black (21-1/4"h X 46-3/16"w)
	1550LSP	3-1/2" Surround - Brushed Nickel (21-1/4"h X 46-3/16"w)
	1550LSZ	3-1/2" Surround - Bronze (21-1/4"h X 46-3/16"w)
	1555LFB	1" Finishing Trim Kit - Black (16-1/4"h X 41-1/2"w)
	1570RCS	4-5/16" GRC Surround Kit - Sandstone (24"h X 49-3/16"w)
ACCESSORIES	1270RBK	Remote Blower Kit
	1506DRK	Decorative Rock Kit
	GV60BRK	1-Hour Shut Down Handset
	GV60NTK	Non-Thermostat Handset




MODEL/FUEL

Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	EnerGuide Rating**	Max. Output** (w/out fan) BTU/hr
1600IN	NG	30,000	16,000	68.3%	22,116
1600IP	LPG	26,000	16,000	68.7%	19,198

Certified to ANSI Z21.88 / CSA 2.33 Vented Gas Fireplace Heater Standard / CAN 1 - 2.17 Gas Fired Appliances For Use at High Altitude
 ** EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-02 test method

ABOUT OUR EFFICIENCY RATINGS: At Valor we use recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading "steady state" efficiency claims made by manufacturers using their own "in-house" test methods. Visit valorfireplaces.com for more information.

L1 2-SIDED FIREPLACE DIMENSIONS

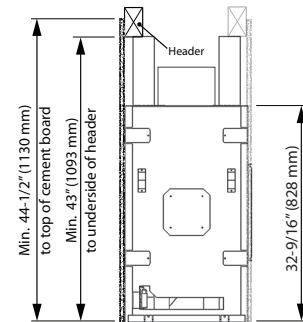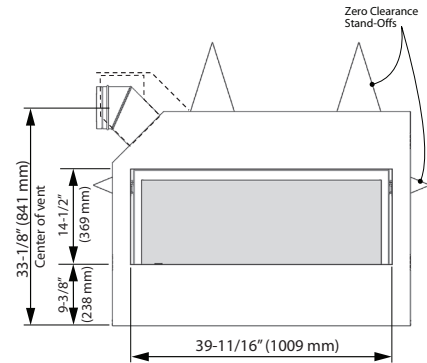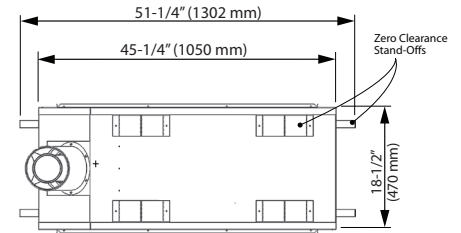

FIREPLACE SAFETY


VALOR ZONE & RADIANT COMFORT

Heating your entire home with a central forced air system wastes valuable energy and is often inefficient. An environmentally friendly and cost effective heat source alternative, Valor fireplaces provide steady, radiant warmth directly where you want it - when you want it.

USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house. Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace. For more information please visit www.valorfireplaces.com/safety.

Please Note: All product information is accurate at time of printing and is subject to change. Printed images may vary from actual product. Refer to the 1600I L1 Linear See-Thru manual for product installation.



Copyright Miles Industries Ltd. 2013
 Proudly made in North America
 BR2S-L113E

Your Authorized Valor Dealer

Printed on recycled paper