



THE ORIGINAL
RADIANT GAS FIREPLACE™
www.valorfireplaces.com

L3 SERIES

Product
Preview



L3 Engine with 1875LFB 1" Adjustable Finishing Trim Kit in black, 1815FBL Fluted Black Liner & 1800DWK Long Beach Driftwood Kit

Valor L3 LINEAR SERIES FIREPLACE COMPONENTS

ENGINES	1800JN	Direct Vent L3 Linear Series Zero Clearance Engine NG
	1800JP	Direct Vent L3 Linear Series Zero Clearance Engine LPG

FUEL BEDS/ LINERS	1800DWK	Long Beach Fire - Driftwood and River Rock
	1800DGM	Murano Decorative Glass Fire
	1815FBL	Fluted Black Liner
	1825RGL	Reflective Glass Liner

FRONTS	1850LSB	5-1/4" 4-Sided Surround - Black powder coated paint
	1875LFB	1" Adjustable Finishing Trim Kit - Black powder coated paint

ACCESSORIES	1156CLA	Co-Linear Adaptor Kit
	1270RBK	Remote Blower Kit
	1506DRK	Decorative Rock Kit
	1595CFK	Circulating Fan Kit
	GV60PAK	Power Adaptor Kit
	GV60NTK	Non Thermostat Remote
	Valor HeatShift System	Valor HeatShift System is a recommended component - see HeatShift brochure & online for product benefits




MODEL/FUEL	Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	EnerGuide Rating*	Max. Output* (w/out fan) BTU/hr
	1800JN	NG	42,000	23,000	66.5%	30,484
	1800JP	LPG	42,000	23,000	66.5%	30,484

Visit the L3 Series webpage for complete info - www.valorfireplaces.com

Certified to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heater American National Standard
CGA - 2.17-91 Gas Fired Appliances for use at High Altitudes
* EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-09 test method

Please Note: All product information is accurate at time of printing and is subject to change.
Printed images may vary from actual product. Refer to the L3 Linear Series engine manual for product installation. For more information visit valorfireplaces.com

PRODUCT DIMENSIONS WINDOW DIMENSIONS - 60.75"w x 12.5"h

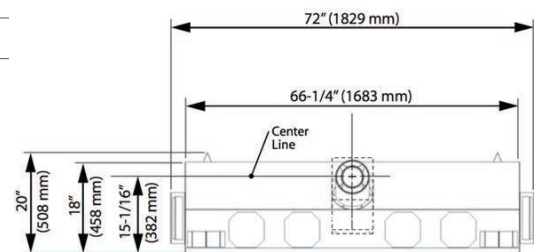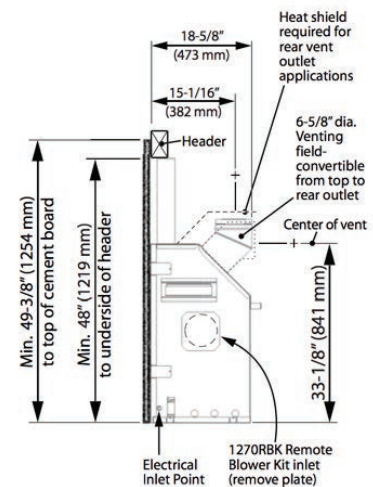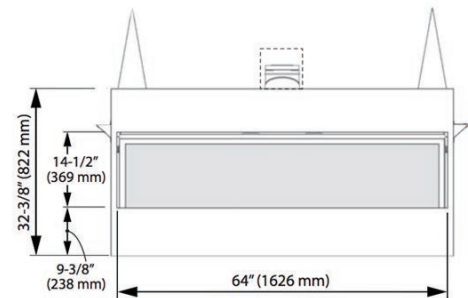

FIREPLACE SAFETY - USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house.




Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace. For more information please visit www.valorfireplaces.com/safety.

Valor THE WISE WAY TO HEAT

valor
THE ORIGINAL
RADIANT GAS FIREPLACE™
www.valorfireplaces.com

Your Authorized Valor Dealer

BRL316E - Apr. 2016



Designed and manufactured by:

Copyright Miles Industries Ltd. 2016
Proudly made in North America