

MODEL #450

assembly (see Fig. 5)
 should be flush to the
 THE BOX ROCKS
 CE OUT OF TRUE
 S SQUARE TO THE
 r of the hearth box
 cure with lock nut
 ing a suitable heat

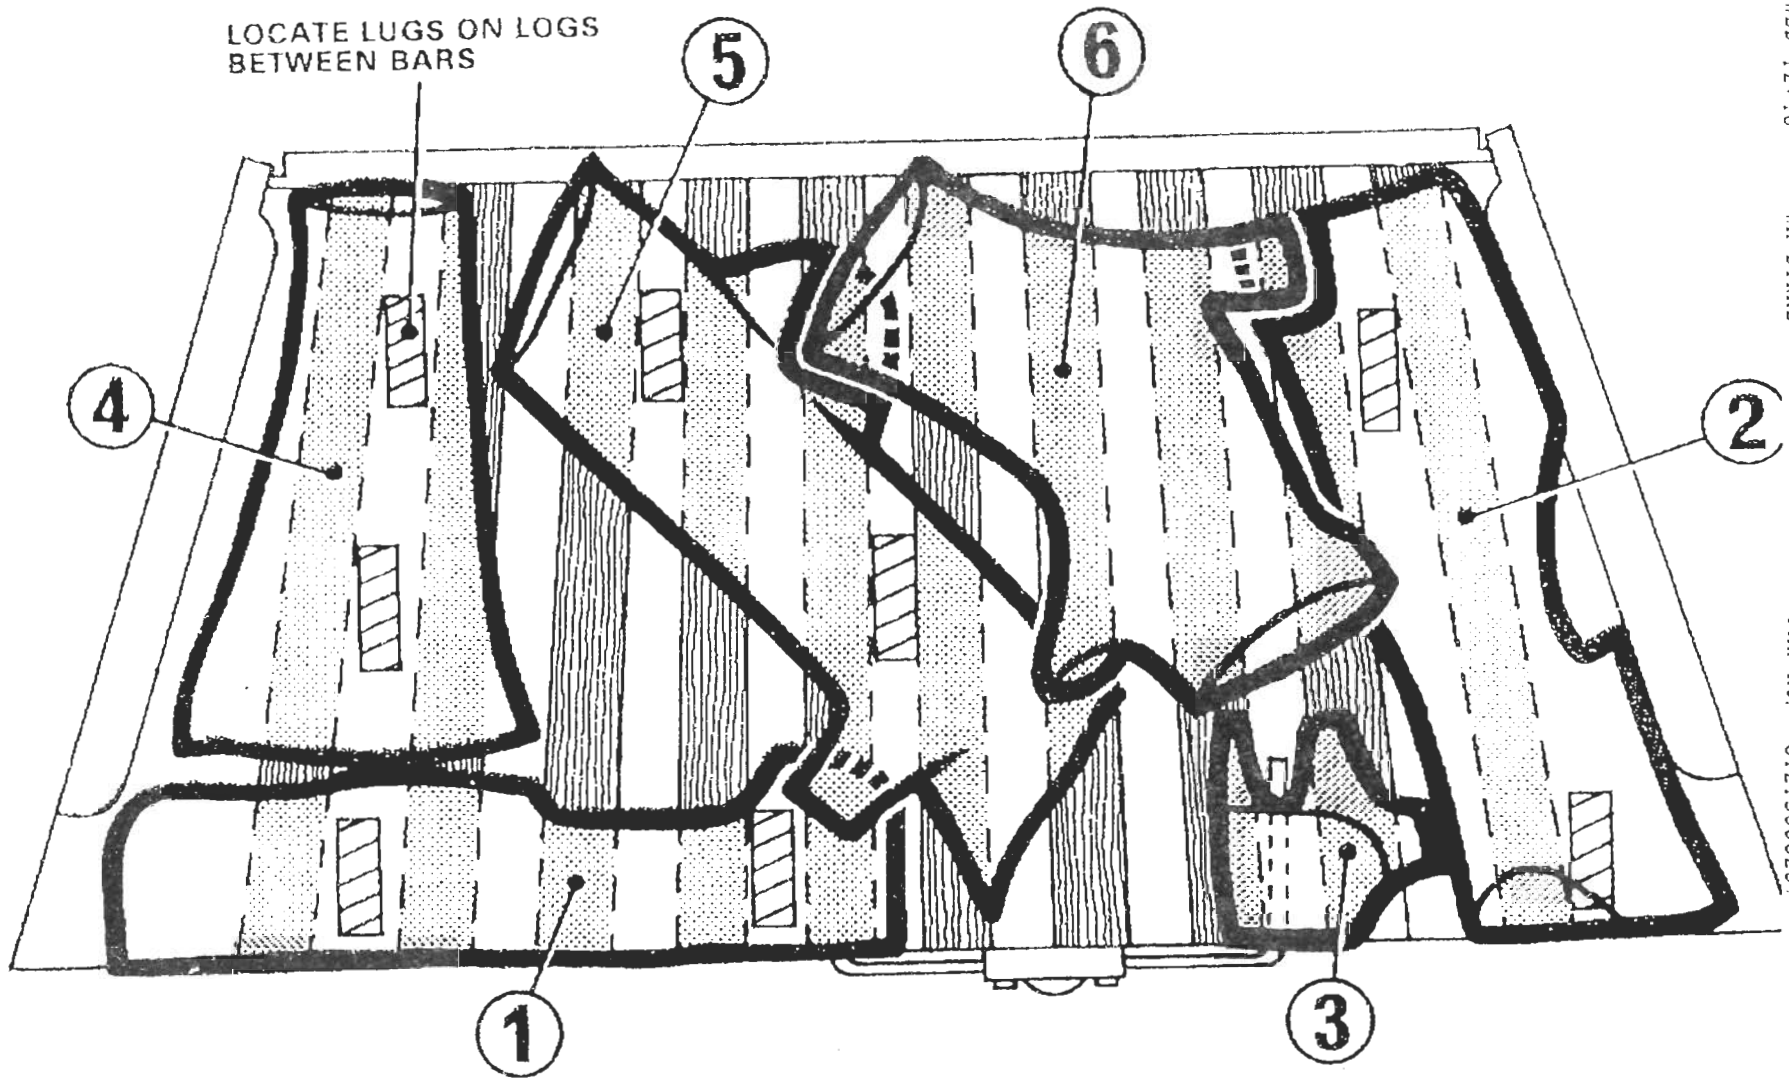


Fig. 5

Fig. 7

ner tips
 d below the support
 n the cut-out slots in
 THESE BARS INTO
 quence stamper on
 logs with a SINGLE
 pre should be used
 p" should never be
 any light dust that
 sharp "coke" with the