

## Co-axial Venting 1100J\*

\* See separate sheet for 1150]

December 2019

1/2

## How to Read the Venting Chart


The chart below applies to co-axial roof or wall termination.

- 1. Maximum 12 inches horizontal pipe section allowed with no vertical rise in vent system.
- 2. The total length of the vent pipe cannot exceed 40 feet.
- 3. The minimum vertical height with roof termination is 6 feet.
- 4. Any combination of rise and run can be used as long as they are within the allowable limits shown on the chart below.
- 5. A maximum of 4 x 90 degrees elbows—or equivalent (2 x 45 degrees = 90 degrees)— can be used. Excludes the 45 degrees take-off elbow shipped with the appliance.
- 6. Each 90 degrees elbow installed on the horizontal plane is equivalent to a 3 feet horizontal pipe; therefore, 3 feet must be subtracted from allowable horizontal run. (45 degrees elbow is equivalent to 18 inches horizontal pipe.)
- 7. All horizontal pipe runs must be graded 1/4 inch per foot upwards in the direction of the exhaust flow. The final pipe length, when terminating through the wall may be graded downwards slightly to prevent water migration.
- 8. A restrictor adjustment is required for most installations having a vertical rise—see next section.

**Note:** The restrictors are shipped loose with the appliance.

Example 1 V Value = V1 (3') + V2 (2') + V3 (1')= 6' H Value = H1 (3') + H2 (2') = 5' Restrictor position #1 required

## **Venting Chart**

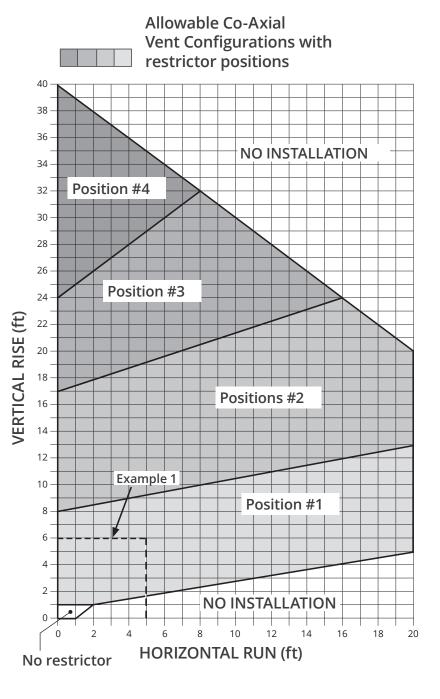

## Co-axial Venting 1100J\*

\* See separate sheet for 1150

December 2019

2/2

